

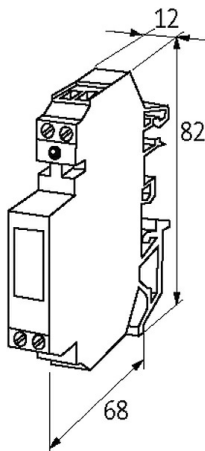
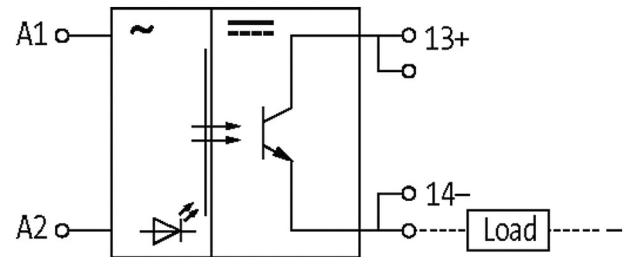
**EMMDS 30-64/0,1 OPTO-COUPLER MODULE**

IN: 230 VAC - OUT: 40 VDC / 0,1 A

Transistor 0.1 A

230 V AC

Double terminals on the output side

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	82x12x64 mm

**Output**

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	50/120 ms
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	4...40 V DC
Switching frequency	max. 10/1 Hz (resist./ind.)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Switching current per output 1 mA...0.1 A

**Input**

Voltage range OFF	0...110 V AC
Voltage range ON	195...253 V AC
LED display	LED (red)
Input current	7.5 mA

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879027939
eClass	27371604
Packaging unit	1.000