

T-COUPLER SLIMLINE M8-MALE 4 POLE/ 2X M8-FEMALE 3P

T-coupler (Slim Line)

Male straight – females straight

M8 – M8, 4-pole




Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

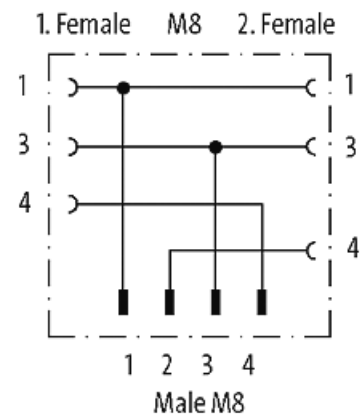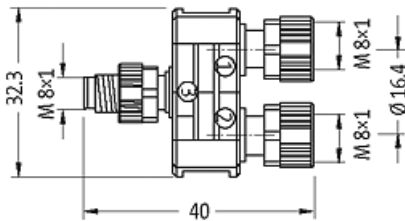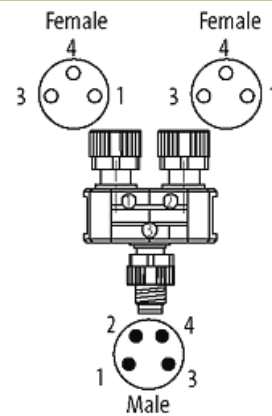

Product may differ from Image



Form

Form 88601

Technical Data

Operating voltage max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread (M8x1 mm) recommended torque 0.4 Nm, self-securing

Protection IP67 inserted and tightened (EN 60529)

Rated surge voltage 0.8 kV

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879118507
eClass	27143423
Packaging unit	1