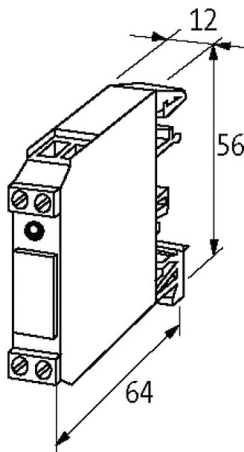
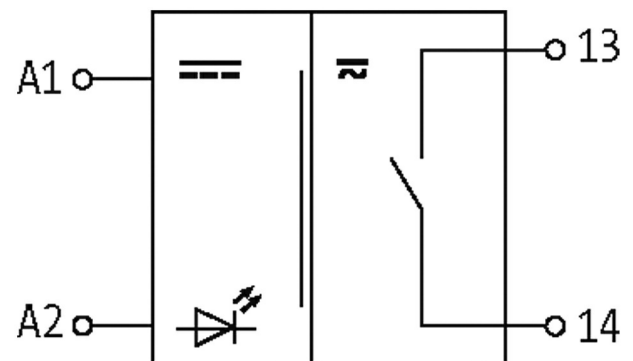


**RMME 11/110 AC INPUT RELAY**

IN: 110 VAC/DC - OUT: 250 VAC/DC / 1 A

1 relay; 1 NO contact  
 6 A  
 110 V AC  
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	1.5 kV
Mech./ elect. life	100 000 000 switching cycles/load dependent
Dimensions HxWxD	56x12x65 mm

**Output**

Min. load current	1 mA
Contact material	AG Ni hv
Energize/release/contact bounce time	10/10/1 ms
Switching voltage	max. 250 V AC/DC

Switching frequency	max. 15 Hz
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching current per output	max. 6 A
<b>Input</b>	
Connection voltage - current	110 V AC/DC (95...121 V AC/DC) - 3.5 mA
LED display	LED (yellow)
<b>Utilization category</b>	
AC-15	4 A (24/110/230 V AC)
AC-1	6 A (24/110/230 V AC)
DC-13	2 A (24 V DC); 0.25 A (110 V DC); 0.1 A (230 V DC)
<b>Commercial data</b>	
country of origin	CZ
customs tariff number	85364900
EAN	4048879027533
eClass	27371001
Packaging unit	1.000