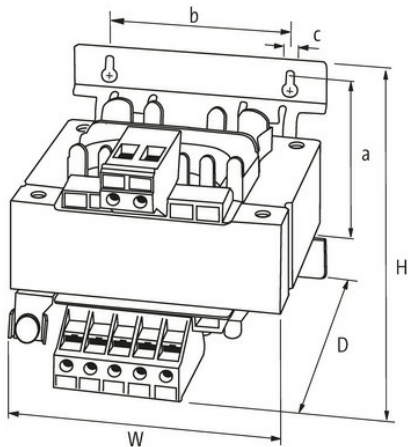
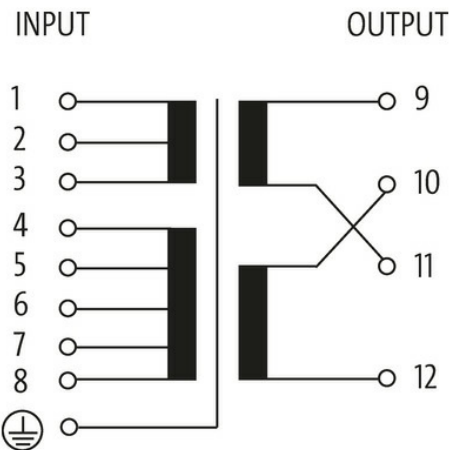


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 800VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
 800 VA
 Isolation class T 40/B
 Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -20...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	134×122×7 mm

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 156×150×150 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 800 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 96 A (208 V AC); 36 A (550 V AC)

Short-circuit current 123 A (208 V AC); 47 A (550 V AC)

Input current 4.2 A (208 V AC); 1.61 A (550 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043180

EAN 4048879078733

eClass 27031302

Packaging unit 1.000