
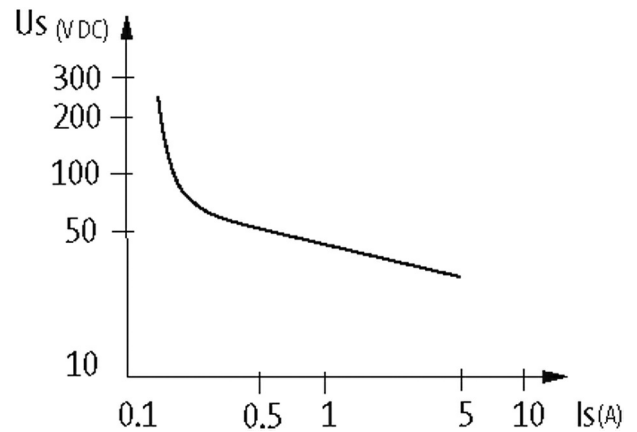
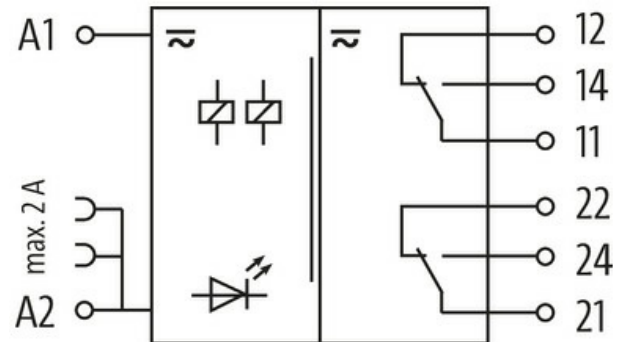
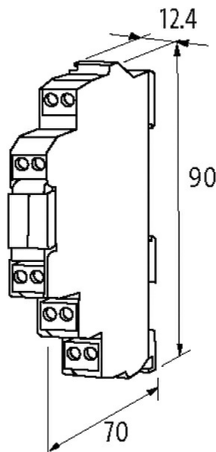


MIRO 12.4 24V-2U OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

2 NO/NC contacts
6 A
24 V AC/DC
Screw terminals

[Link to Product](#)**Illustration**

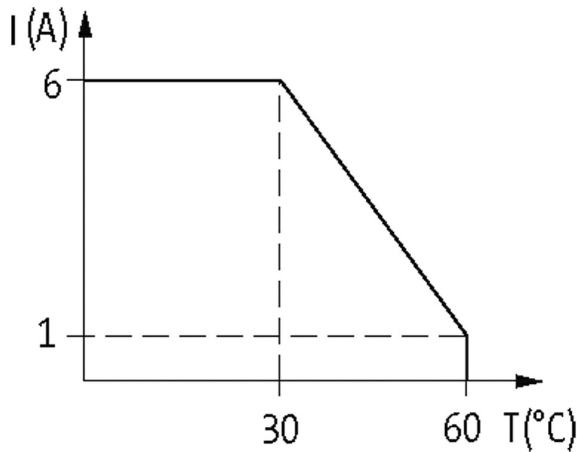

Product may differ from Image

**General data**

| | |
|------------------------|--|
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -20...+55 °C |
| Test isolation voltage | 4 kV; safe separation (EN 60947-1) |
| Mech./ elect. life | 20 000 000 switching cycles/load dependent |
| Dimensions H×W×D | 90×12.4×70 mm |

Output

| | |
|--------------------------------------|----------------------|
| Min. load current | 100 mA (12 V DC) |
| Contact material | Ag Sn O ₂ |
| Energize/release/contact bounce time | 10/15/1.5 ms |
| Switching voltage | max. 250 V AC/DC |
| Switching frequency | max. 10 Hz |
| Power rating (voltage dependent) | max. 1500 VA/120 W |
| Switching current per output | max. 6 A |

Input

| | |
|------------------------------|--|
| Connection voltage - current | 24 V AC/DC (19.2...30 V AC/DC) - 20 mA |
| LED display | LED (green) |

Utilization category

| | |
|-------|---|
| AC-15 | 3 A (24/110/230 V AC) |
| AC-12 | 6 A (24/110/230 V AC) |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85364900 |
| EAN | 4048879000147 |
| eClass | 27371001 |
| Packaging unit | 1.000 |