

## M8 panel feed through 4p shielded

Control cabinet entry system

Male - female



M8, 4-pole

Rear mounting


shielded

### [Link to Product](#)

#### Illustration

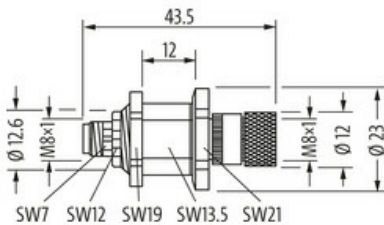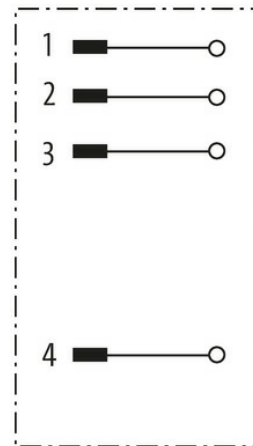


panel cut out



Male



Female



Product may differ from Image

#### Form

Form 88112

#### Technical Data

Operating voltage	60 V
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
No. of poles	4
Material group	3
Mating cycles	≥ 100
LED display	no
Compression gland	M8
Protection	IP67 inserted and tightened (EN 60529)
suitable for corrugated tube (internal Ø)	without
Housing	Metal
Over voltage category	2

#### General data

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Mounting method	inserted, tightened
Material (contact)	Copper alloy
Material (contact surface)	Au
Pollution Degree	3
Temperature range	-25...+85 °C
Material (contact carrier)	PA

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879689304
eClass	27143423
Packaging unit	1.000