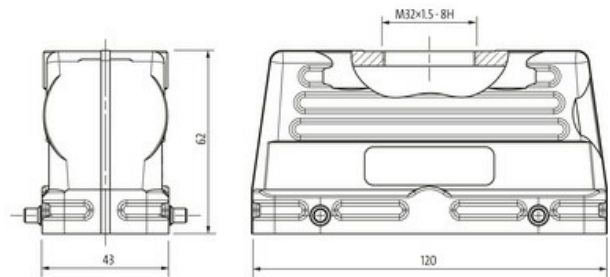


**B24 Hood, low profile, IP65**

Double locking lever, top entry M32

B24  
Hood (low)  
Double locking lever  
IP65

Technical data will be only guaranteed with Murrelektronik components.

**[Link to Product](#)****Illustration**

Product may differ from Image

**Technical Data**

|                      |  |
|----------------------|--|
| Mating cycles        | min. 500   |
| Locking of ports     | Double locking lever                               |
| Protection (housing) | IP65 inserted and tightened (EN 60529), with gland |

**General data**

|                            |                        |
|----------------------------|------------------------|
| Temperature range          | -40...+100 °C          |
| Material (housing)         | Aluminum die-cast      |
| Housing type               | Hood                   |
| Threaded hole              | M32                    |
| Size                       | B24                    |
| Cable outlet               | straight               |
| Locking material           | Steel (galvanized)     |
| Climatic category          | 40/100/21 (EN 60068-1) |
| Material (housing surface) | powder-coated          |
| Dimensions H×W×D           | 62×43×120 mm           |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85389099      |
| EAN                   | 4048879647045 |
| eClass                | 27143424      |
| Packaging unit        | 1.000         |