

MTS 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 40VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers



40 VA

Isolation class T 40/B

Other voltages on request.

[Link to Product](#)

Illustration

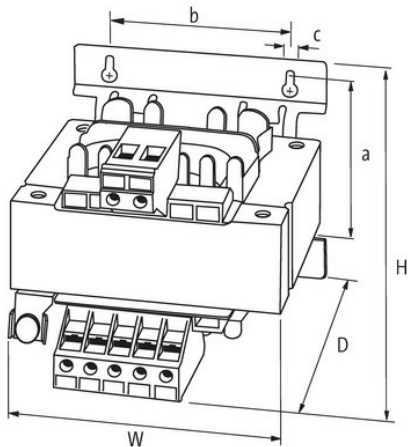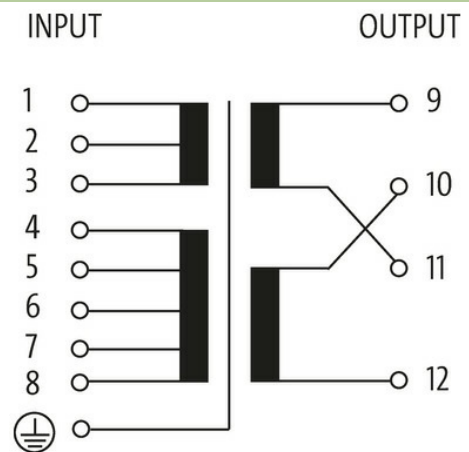

Product may differ from Image



General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -20...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8×8.4 mm
Fixing centers a×b×c	56×56 mm

Dimensions H×W×D 88×78×93 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 40 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 3.2 A (208 V AC); 1.2 A (550 V AC)

Short-circuit current 1.9 A (208 V AC); 0.7 A (550 V AC)

Input current 0.25 A (208 V AC); 0.095 A (550 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043180

EAN 4048879444187

eClass 27031302

Packaging unit 1.000