

MIUW ANALOG COUPLER COMPONENT

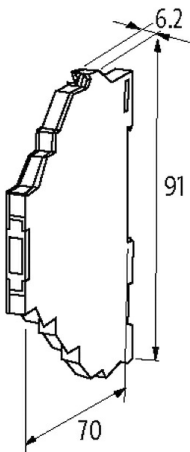
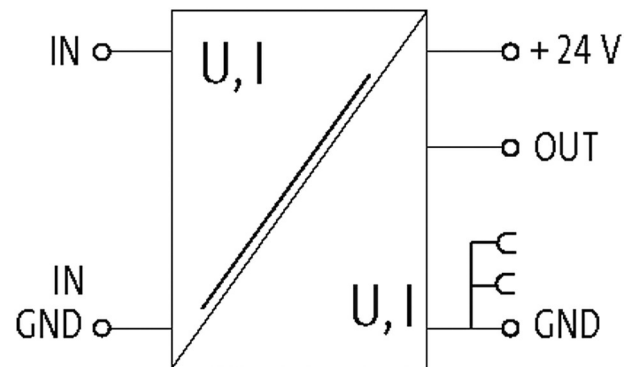
IN: 4..20 mA - OUT: 0..10 V

INPUT: 4...20 mA

OUTPUT: 0...10 V DC, 20 mA

Spring clamp terminals

Input and output galvanically separated

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Operating voltage	24 V DC $\pm 20\%$, smoothed
Operating current	50...70 mA
Frequency	max. 500 Hz

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Test isolation voltage	1.5 kV
Dimensions HxWxD	91x6.2x70 mm

Voltage output signals

Load	max. 25 mA
------	------------

Commercial data

country of origin	CZ
customs tariff number	85437090
EAN	4048879022477
eClass	27210990
Packaging unit	1.000