



MICO FUSE 250 FUSE HOLDER 5X20MM 8 CHANNELS

IN: 250V AC/DC OUT: 250V AC/DC / 6A AC/DC

MICO FUSE 250
8 channels
Total current: max. 40 A

[Link to Product](#)

Illustration

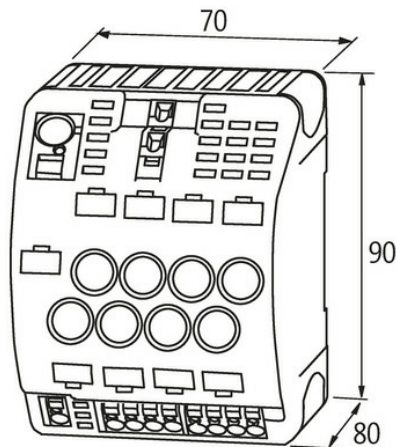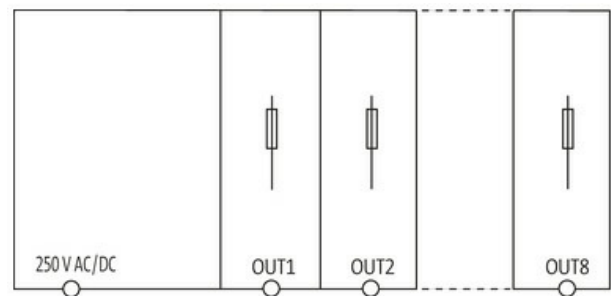

Product may differ from Image



Technical Data

Operating voltage	max. 250 V AC/DC
Operating current	max. 6 A (40 °C)
Total current	max. 40 A

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C

Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Output terminals	1× 0.5...4 mm ²
Input terminals	1× 16 mm ²

Commercial data

country of origin	CZ
customs tariff number	85363030
EAN	4048879335270
eClass	27371802
Packaging unit	1.000