

IMPACT20 ETHERCAT, DIGITAL OUTPUT MODULE

16 digital outputs

Digital outputs


DO16 - 0.5 A

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Link to Product

Illustration

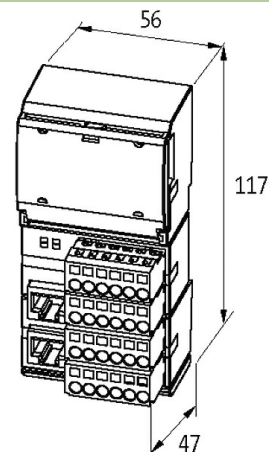

Product may differ from Image



General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Protection	IP20
Dimensions H×W×D	117×56×47 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
-------------------	----------------------

Output

Total current	max. 8 A
Switching current per output	max. 0.5 A (short-circuit and overload protected)

Connections

Fieldbus	Ethernet 10/100 Mbit/s; 2× RJ45 (female)
Sensor-system/actuator supply	6× spring clamp plug-in terminals, max. 2.5 mm ² (max. 12 A)
I/O ports	18× spring clamp plug-in terminals, max. 2.5 mm ² (max. 12 A)

EtherCAT

Addressing	automatic
------------	-----------

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Monitoring - no voltage	yes
Short-circuit and overload	yes
Commercial data	
country of origin	DE
customs tariff number	85389099
EAN	4048879047999
eClass	27242604
Packaging unit	1.000