

T-COUPLER SLIMLINE M12 MALE / 2X M8 FEMALE

T-coupler (Slim Line)

Male straight – females straight

M12 – M8, 4-pole





Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

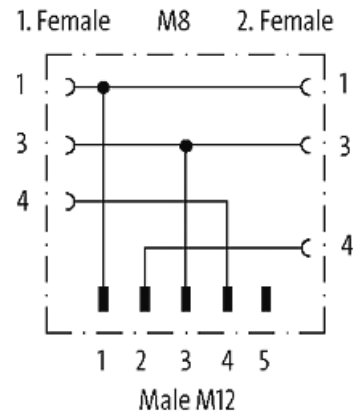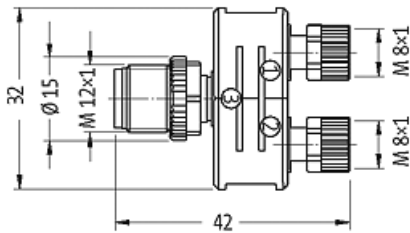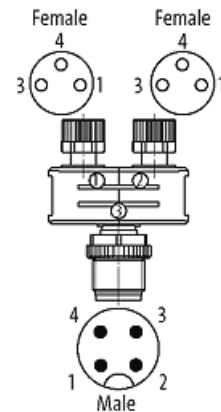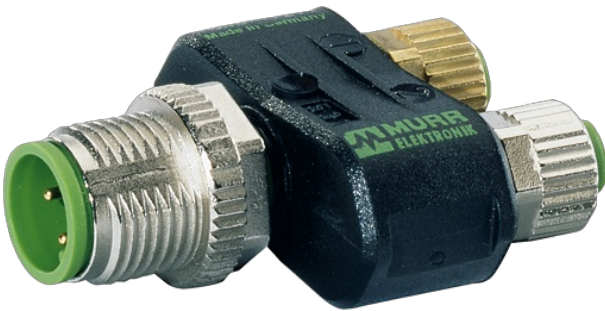

Product may differ from Image



Form

Form 41211

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Rated surge voltage	1.5 kV

General data

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879144773
eClass	27143423
Packaging unit	1