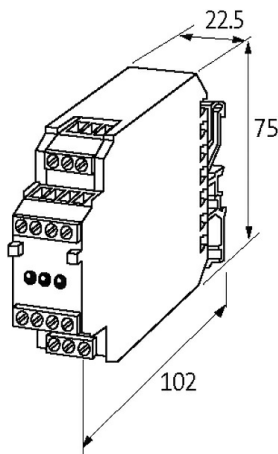
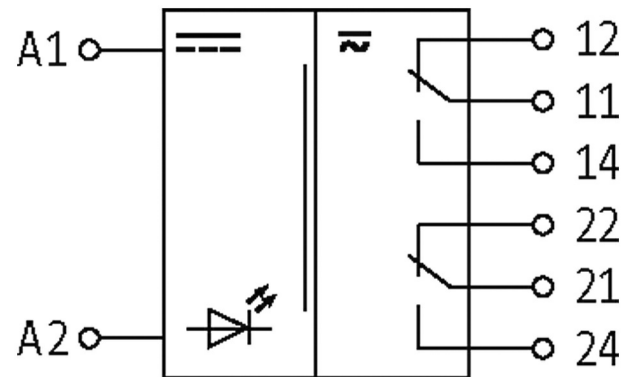


**RM 12/24 OUTPUT RELAY**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 2 NO/NC contacts  
8 A  
24 V DC  
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	4.0 kV
Mech./ elect. life	50 000 000 switching cycles/load dependent
Dimensions HxWxD	75x22.5x102 mm

**Output**

Min. load current	100 mA
Contact material	Ag Ni 0.15 hv
Energize/release/contact bounce time	10/10/2 ms
Switching voltage	max. 250 V AC/DC

Switching frequency	max. 0.1 Hz (with load)
---------------------	-------------------------

Power rating (voltage dependent)	max. 1250 VA/240 W
----------------------------------	--------------------

Switching current per output	max. 8 A
------------------------------	----------

**Input**

Connection voltage - current	24 V AC/DC (20.4...26.4 V AC/DC) - 20 mA
------------------------------	--

LED display	LED (red)
-------------	-----------

**Utilization category**

AC-15	3 A (24/110/230 V AC)
-------	-----------------------

AC-1	8 A (24/110/230 V AC)
------	-----------------------

DC-13	2 A (24 V DC); 0.3 A (110 V DC); 0.2 A (230 V DC)
-------	---

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85364900
-----------------------	----------

EAN	4048879027526
-----	---------------

eClass	27371001
--------	----------

Packaging unit	1.000
----------------	-------