



**MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)**

D-cod., 4-pol., 0,14-0,34mm<sup>2</sup>, shielded


Ethernet CAT5  
Female straight  
M12, 4-pole  
D-coded  
shielded  
IDC terminals  
Sealing range (cable Ø): 4.5...8.8 mm

[Link to Product](#)


Illustration

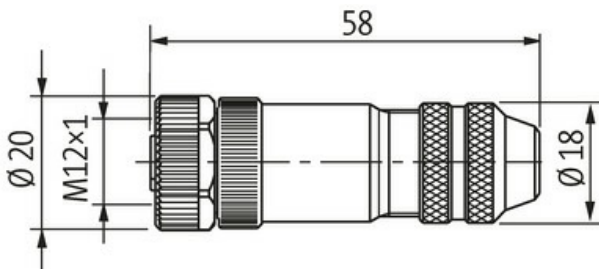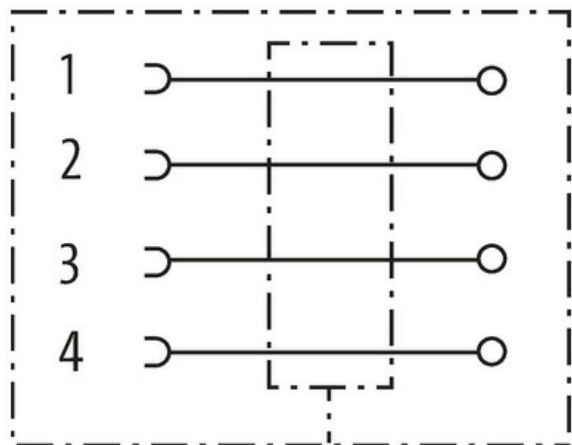

Female



Product may differ from Image



**Form**

Form 14621

**Technical Data**

Operating voltage max. 50 V AC/DC

Operating current per contact	max. 4 A
Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	up to 100 Mbit/s full duplex
Coding	M12, D-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Connection cross section	0.14...0.34 mm <sup>2</sup> (AWG 26...22)
Sealing range (cable Ø)	4.5...8.8 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Zinc die casting, matte nickel plated

**General data**

Temperature range	-40...+85 °C
-------------------	--------------

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879197229
eClass	27279221
Packaging unit	1.000