


## INTERFACE TERMINAL RELAY

IN: 24 VDC - OUT: 24VDC / 0.2 A / 20 kHz


Transistor 0.2 A  
24 V DC  
Control current 2.8 mA (24 V DC)  
Spring clamp terminals

### [Link to Product](#)

#### Illustration

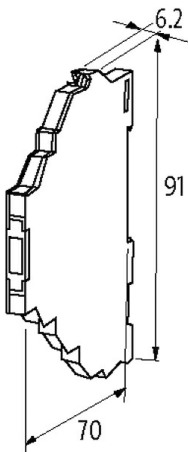

Product may differ from Image

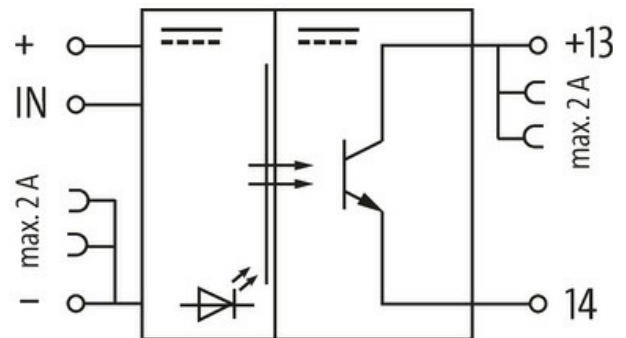

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x70 mm

#### Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	14/20 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC

Switching frequency	max. 20 kHz
---------------------	-------------

Switching current per output	0.1 mA...0.2 A
------------------------------	----------------

**Input**

Control current	2.8 mA (24 V DC)
-----------------	------------------

Voltage range OFF	0...5 V DC
-------------------	------------

Voltage range ON	16...30 V DC
------------------	--------------

LED display	LED (yellow)
-------------	--------------

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85414900
-----------------------	----------

EAN	4048879024549
-----	---------------

eClass	27371604
--------	----------

Packaging unit	1.000
----------------	-------