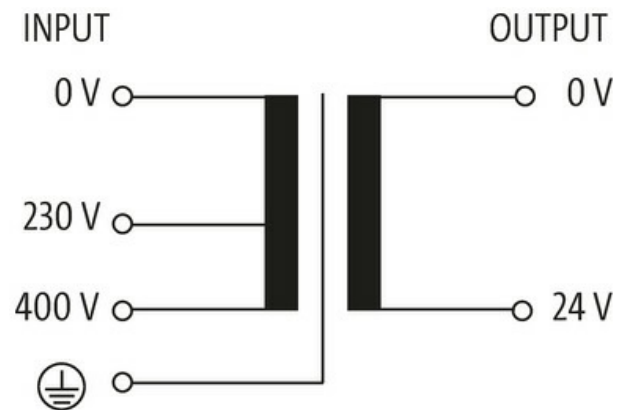


MST 1-PHASE SAFETY TRANSFORMER

P: 320VA IN: 230/400VAC OUT: 24VAC

Single-phase safety transformer
320 VA
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8×10 mm
Fixing centers a×b×c	74.4×90×5.8 mm

Dimensions H×W×D 92×120×122.4 mm

Output

Output voltage 24 V AC (SELV)

Output rating 320 VA

Input

Input voltage 230/400 V AC

Inrush current 17.5 A (230 V AC); 10.1 A (400 V AC)

Short-circuit current 28 A (230 V AC); 16.1 A (400 V AC)

Input current 1.52 A (230 V AC); 0.88 A (400 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043180

EAN 4048879078610

eClass 27031302

Packaging unit 1.000