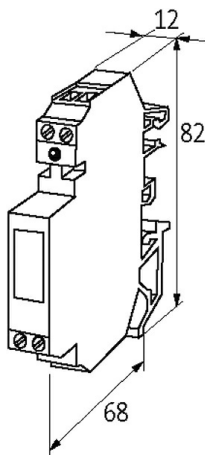
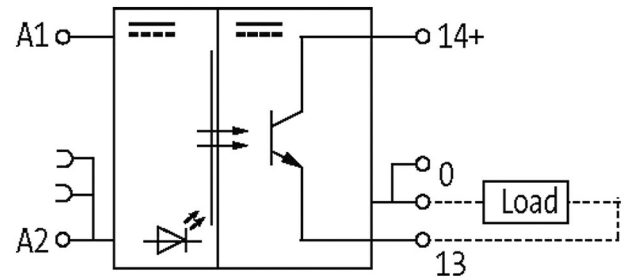


**AMMDS 10-44/1 OPTO-COUPLER MODULE**

IN: 35 VDC - OUT: 35 VDC / 0.2 A

Transistor 0.2 A  
24 V DC  
with minus plug link  
Double terminals on the output side  
for rapid switching

**[Link to Product](#)****Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	68x82x12 mm

**Output**

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	20/14 µs
Saturation voltage (across output)	max. 0.5 V DC

Switching voltage	5...35 V DC
Switching frequency	max. 20 kHz/200 Hz (resist./ind.)
Switching current per output	1 mA...0.2 A

**Input**

Plug link (supplied)	Art-No. 90960
Voltage range OFF	0...5 V DC
Voltage range ON	10...35 V DC
LED display	LED (red)
Input current	10 mA

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879027977
eClass	27371604
Packaging unit	1.000