

Modlight Illumix Slim Line C4W

LED machine lamp, IP54, 24VDC, 2xM8 connection



Modlight Illumix Slim Line C

4 W

expandability


[Link to Product](#)

Illustration

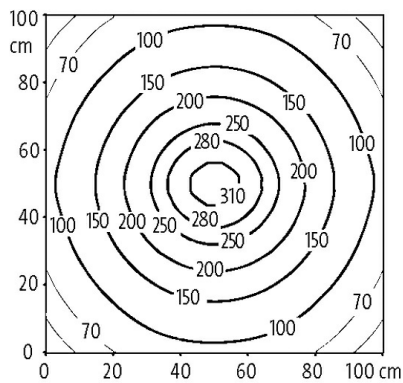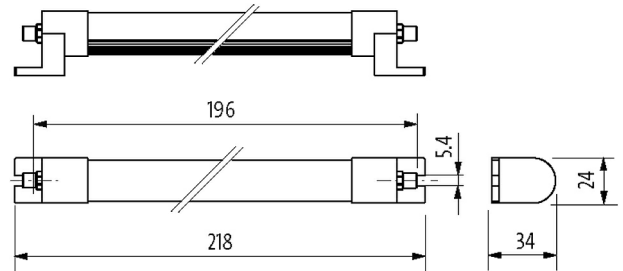

Light mounting: 50 cm

Em: 146 lx Emax: 328 lx Emin: 50 lx

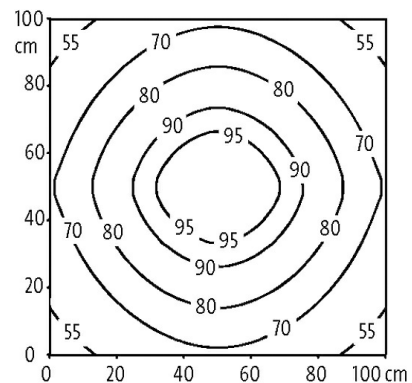

Light mounting: 100 cm

Em: 77 lx Emax: 102 lx Emin: 50 lx

Product may differ from Image



Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M8 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 420 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K
Lighting angle	> 120°
Input current	4 W

General data	
Mounting method	rotatable
Temperature range	-30...+50 °C
Material (housing)	Anodized aluminum
Material (light cover)	Diffuse polystyrene (PS)
Installation altitude	Operation up to 2 000 m
Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
Screw head-Ø	max. 12 mm/M5
Relative humidity	5...95%
Protection	IP54
Dimensions HxWxD	34x218x24 mm (1.34x8.58x0.94 in)
Shock load	50 g, 11 ms
Commercial data	
country of origin	DE
customs tariff number	94054239
EAN	4048879752268
eClass	27110306
Packaging unit	1.000