

## M12 MALE ON REAR OF MSUD VALVE PLUG FORM B 10 MM

Form B (10 mm) – M12, connector at the rear

max. 125 V AC/DC

without components




3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

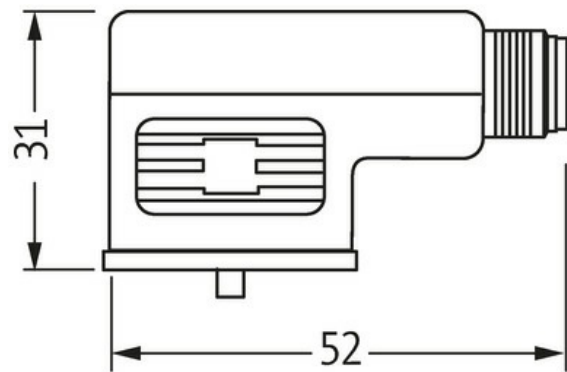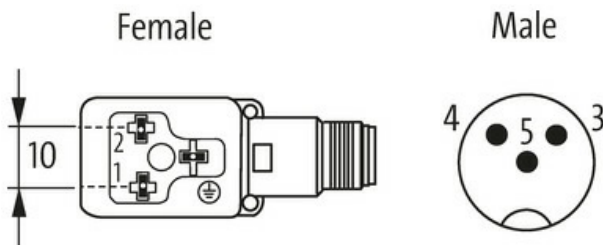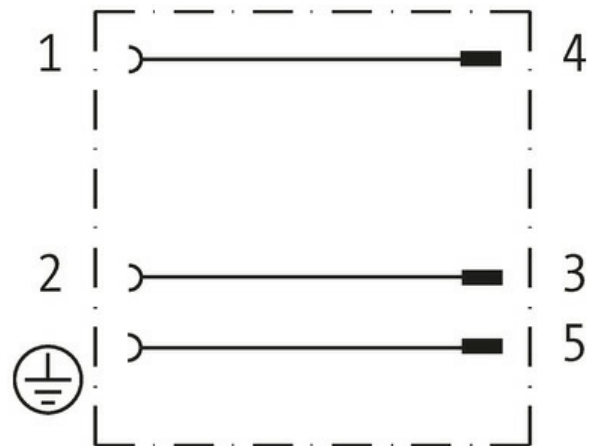

Depth: 22 mm

Product may differ from Image



#### Form

Form 41921

#### Technical Data

Operating voltage max. 125 V AC/DC

Rated surge voltage 1.5 kV

Operating current per contact max. 4 A

Material group	IEC 60664-1, category I
Coding	M12, A-coded
LED display	no
Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Steel (galvanized)
Configuration	2 contacts + PE

**General data**

Mounting method	inserted, tightened
Pollution Degree	3
Temperature range	-25...+85 °C

**Commercial data**

country of origin	CZ
customs tariff number	85366990
EAN	4048879143387
eClass	27143423
Packaging unit	1.000