


M12 BUS TERMINATING PLUG FOR PROFIBUS



PROFIBUS
Terminating resistor
Male
M12, 4-pole
B-coded

[Link to Product](#)

Illustration

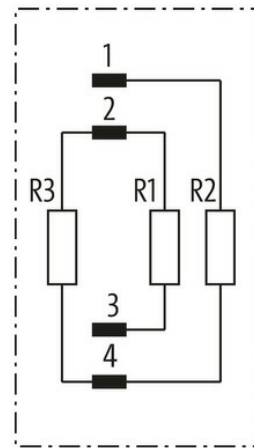

Male

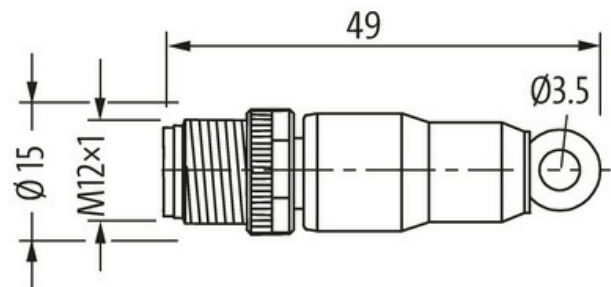

Product may differ from Image



Form

Form 14041

Technical Data

Operating voltage max. 30 V DC

Operating voltage (only UL listed) max. 30 V DC

Operating current per contact max. 4 A

Locking of ports Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing

| | |
|------------|--|
| Protection | IP67 inserted and tightened (EN 60529) |
|------------|--|

| | |
|------------------|---------------------------------------|
| Locking material | Zinc die casting, matte nickel plated |
|------------------|---------------------------------------|

General data

| | |
|-------------------|--------------|
| Temperature range | -25...+85 °C |
|-------------------|--------------|

Commercial data

| | |
|-------------------|----|
| country of origin | DE |
|-------------------|----|

| | |
|-----------------------|----------|
| customs tariff number | 85331000 |
|-----------------------|----------|

| | |
|-----|---------------|
| EAN | 4048879198592 |
|-----|---------------|

| | |
|--------|----------|
| eClass | 19070403 |
|--------|----------|

| | |
|----------------|-------|
| Packaging unit | 1.000 |
|----------------|-------|