

RJ45 St. 0° / RJ45 St. 0°, Gigabit

FRNC/LS0H 4x2xAWG27 shielded rd UL 0,2m

Ethernet CAT6A

Male straight – male straight


RJ45 – RJ45, 8-pole
shielded

without cable sleeves

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

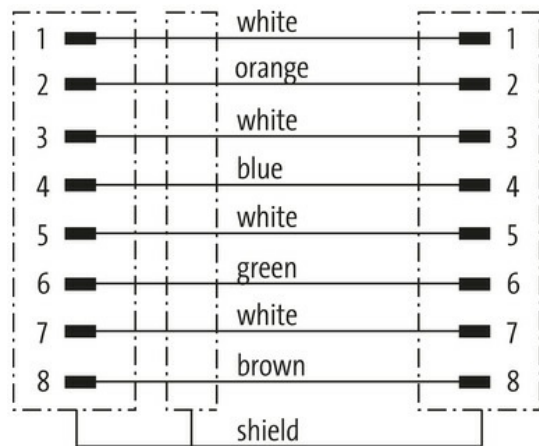[Link to Product](#)**Illustration**


Male



Male

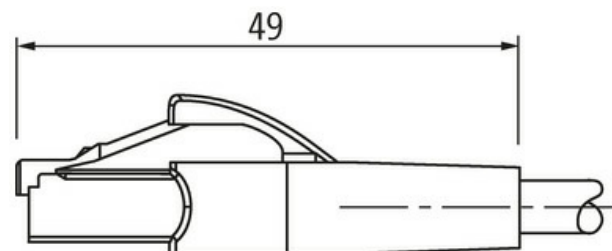

Product may differ from Image



* only for products with UL/CSA approved cable

Form

Form 74711

Technical Data

Operating voltage	max. 60 V DC
Operating voltage (only UL listed)	25 V DC

Rated surge voltage	1.0 kV
Operating current per contact	max. 1.76 A (UL: 1.0 A)
Transfer parameters	CAT6A
Material group	IEC 60664-1, category I
LED display	no
Locking of ports	Snap-in connector
Protection	IP20
Material	PUR
Locking material	PA
suitable for corrugated tube (internal Ø)	without

General data

Mounting method	inserted
Pollution Degree	3
Temperature range	-25...+85 °C, depending on cable quality

Cables

No./diameter of wires	4 × 2 × AWG27/7
Wire isolation	FRNC (wh, bl, wh, or, wh, gn, wh, br)
Outer Ø	6.0 mm ±5%
Cable number	578
Material (wire)	Cu wire, bare
Shield	yes
Jacket Color	red
Temperature range (fixed)	-20...+60 °C
Temperature range (mobile)	0...+50 °C
Bend radius (moving)	5 × outer Ø
Material (jacket)	FRNC

Commercial data

country of origin	HU
customs tariff number	85444210
EAN	4048879827065
eClass	27061801
Packaging unit	1.000