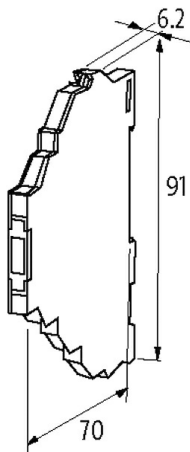
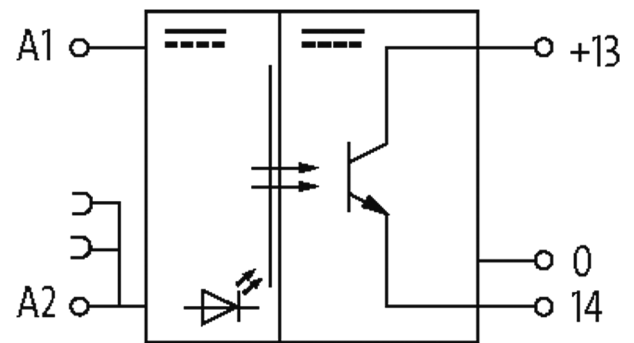


**MIRO 6.2 OPTO-COUPLER MODULE**

IN: 35 VDC - OUT: 30 VDC / 0.2 A max. 20 kHz

Transistor 0.2 A  
 24 V DC  
 Switching frequency: max. 20 kHz  
 Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	91×6.2×70 mm

**Output**

The information in this brochure has been compiled with the utmost care.  
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 25 $\mu$ A
Switching time ON/OFF	5/7 $\mu$ s
Saturation voltage (across output)	max. 0.3 V AC/DC
Switching voltage	10...30 V DC
Switching frequency	max. 20 kHz/200 Hz (resist./ind.)
Switching current per output	1 mA...0.2 A

**Input**

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...35 V DC
LED display	LED (green)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879024532
eClass	27371604
Packaging unit	1.000