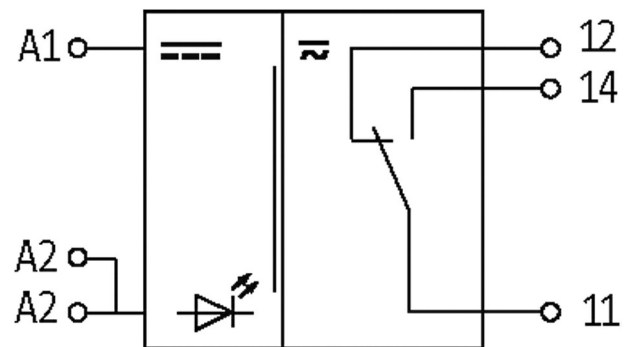


RMI 24V AC/DC OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/DC / 15 A

1 relay; 1 NO/NC contact
 15 A
 24 V AC/DC
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	6.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent

Output

Min. load current	100 mA
Contact material	Ag Ni
Energize/release/contact bounce time	10/15/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 0.1 Hz (with load)
Power rating (voltage dependent)	max. 4000 VA/240 W
Switching current per output	max. 15 A

Input

Connection voltage - current	21.6...26.4 V AC/DC
LED display	red

Utilization category

AC-15	6 A (24 V AC; 230 V AC)
AC-1	15 A (24 V AC; 230 V AC)
DC-13	2 A (24 V DC); 0.3 A (230 V DC)

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879027397
eClass	27371001

Packaging unit

1.000