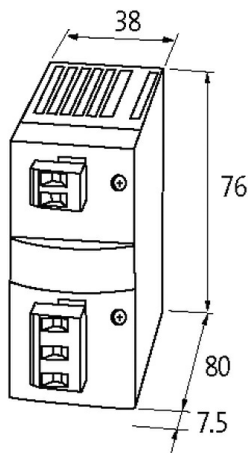
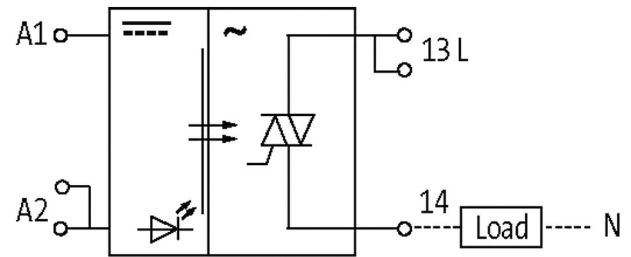


MIRO TRIAC 1X400VAC-5A

IN: 53 VDC - OUT: 400 VAC / 5 A

Triac 5 A
24 V DC
Screw plug-in terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Housing	Black plastic, flame retardant
Dimensions HxWxD	76x38x80 mm

Output

Surge current	70 A
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 0.15 V AC
Switching voltage	12...400 V AC
Switching frequency	max. 20/1 Hz (resist./ind.)

Switching current per output 10 mA...5 A (no derating)

Input

Control voltage	24 V DC
Control current	approx. 7.8 mA
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (green)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021005
eClass	27371604
Packaging unit	1.000