



MICO BASIC 4.4 electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V / 4 A

MICO BASIC 4.4
4 channels
Current adjustment 4 A

[Link to Product](#)

Illustration

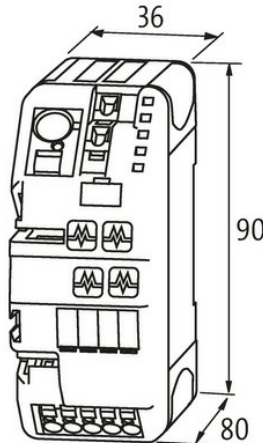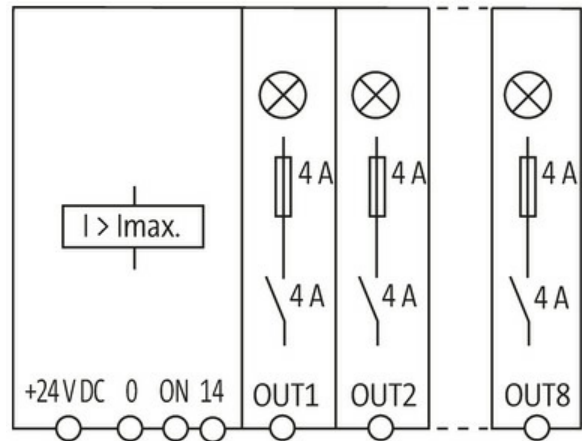

Product may differ from Image



General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×36×80 mm
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 × 4 mm ²
Input terminals	1 × 16 mm ²

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Alarm terminals	2.5 mm ²
-----------------	---------------------

Output

Inrush capacity	max. 20 mF (per channel)
-----------------	--------------------------

Current adjustment	4 A
--------------------	-----

Input

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

Control inputs

Input voltage (ON)	10...30 V DC
--------------------	--------------

Impulse length (ON)	min. 20 ms
---------------------	------------

Control outputs

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85363010
-----------------------	----------

EAN	4048879332415
-----	---------------

eClass	27371802
--------	----------

Packaging unit	1.000
----------------	-------