
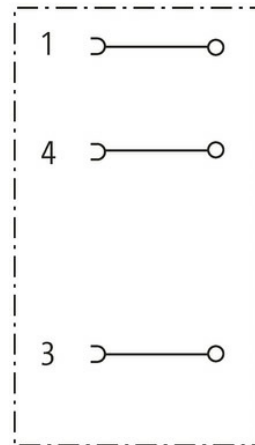
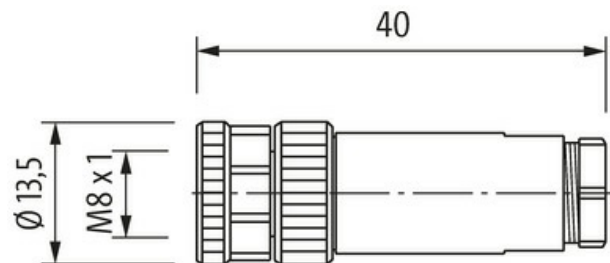


**M8 FEMALE 0° FIELD-WIREABLE SCREW TERM.**3-pol. 0,14...0.5mm<sup>2</sup>


Female straight  
M8, 3-pole  
Screw terminals  
Connection cross section: 0.14...0.5 mm<sup>2</sup>

[Link to Product](#)**Illustration**

Female



Product may differ from Image

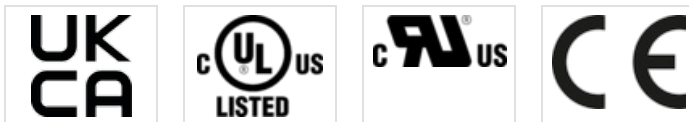**Form**

Form 08621

**Technical Data**

Operating voltage	max. 50 V AC/60 V DC
Operating current per contact	max. 4 A
Material group	III
Coding	A-coded

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Compression gland	M8 (AF12,5)
Connection cross section	0.14...0.5 mm <sup>2</sup>
Sealing range (cable Ø)	2.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Over voltage category	II

**General data**

Material (contact)	Brass, gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material (housing)	PA
Dimensions H×W×D	40×13,5×13,5 mm

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879224512
eClass	27279221
Packaging unit	1.000