


MIRO TH 5VDC SK OPTO-COUPLER MODULE

IN: 5,5 VDC - OUT: 250 VAC / 0,5A



Triac 0.5 A
5 V DC
Screw terminals

[Link to Product](#)

Illustration

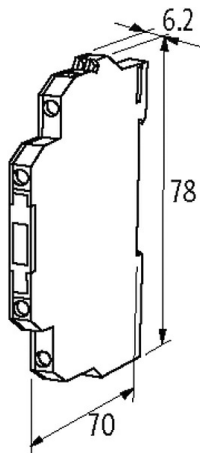

Product may differ from Image

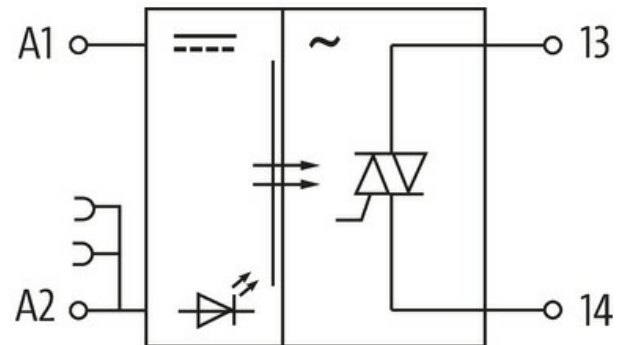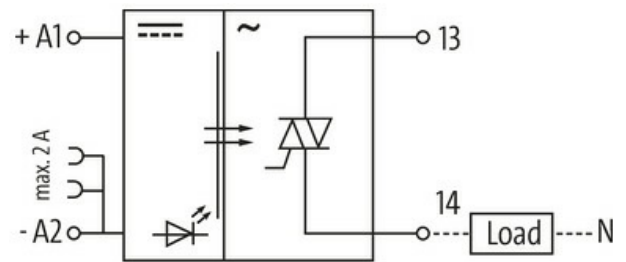

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	24...250 V AC
Switching frequency	max. 20 Hz, depending on suppression
Switching current per output	2 mA...0.5 A

Input

Control current	6 mA
Voltage range OFF	0...2 V DC
Voltage range ON	4...5.5 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879026772
eClass	27371604
Packaging unit	1.000