


Mico Pro electronic circuit protection, 4 channel

IN: 24 V DC OUT: 24 V DC / 4 A CL2

Mico Pro® fix 4.4
4 channels
Current adjustment 4 A
Build your own Mico Pro® online:
<https://micopro.murrelektronik.com>

Link to Product

Illustration

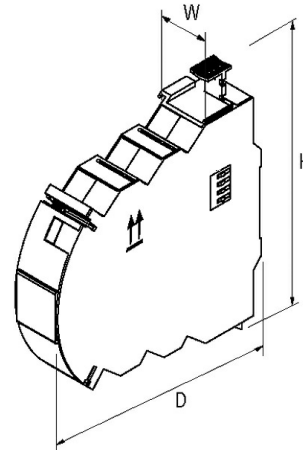

Product may differ from Image

Class 2
UL1310/NEC 725



General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions HxWxD	130x24x114 mm
Bridging concept	Bridge set (max. 40 A)

Output

Parallel usage/serial usage	-/Selectivity in 2 levels
No. of channels	4
Inrush capacity	max. 30 mF
Tolerance	0...+20%
Current adjustment	4 A

Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Cross section (flex)	0.2...4 mm ² (AWG 24...12)
Connection	Push-In spring clamp terminals

Cross section (rigid) 0.2...2.5 mm² (AWG 24...14)

Control inputs

Input voltage (ON)	via power module
Impulse length (CTRL)	via power module
Input voltage (CTRL)	via power module
Impulse length (ON)	via power module

Control outputs

Early warning (90%)	via power module
Group alarm output	via power module

Commercial data

country of origin	CZ
customs tariff number	85363030
EAN	4048879772785
eClass	27371802
Packaging unit	1.000