

RJ45 PROFESSIONAL MALE 0° 4 POL. SHIELDED

Ethernet

Ethernet CAT5

Male straight

RJ45, 4-pole

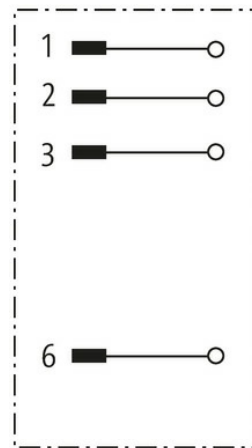
shielded

Protection IP20

Quick connection technology

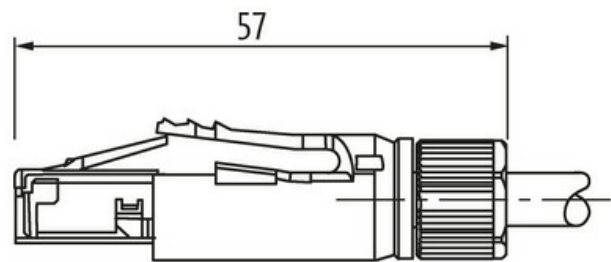
Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


[Link to Product](#)**Illustration**

Male

6 321



Product may differ from Image

**Form**

Form

74001

Technical Data

| | |
|-------------------------------|--------------------------------------------------|
| Operating voltage | max. 60 V DC |
| Operating current per contact | max. 2 A |
| Transfer parameters | CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1) |
| Transfer rate | up to 100 Mbit/s full duplex |
| Connection cross section | 0.14...0.34 mm ² (AWG 26...22) |
| Sealing range (cable Ø) | 4.5...9.0 mm |
| Protection | IP20 |
| Outer wire Ø | max. 1.6 mm |

General data

| | |
|-------------------|--------------|
| Temperature range | -40...+70 °C |
|-------------------|--------------|

Commercial data

| | |
|-----------------------|---------------|
| country of origin | RO |
| customs tariff number | 85366990 |
| EAN | 4048879409346 |
| eClass | 27279221 |
| Packaging unit | 1.000 |