


CUBE20 ANALOG INPUT MODULE

4 analog inputs

AI4 - (E) 4× M12 (TH)
for thermo elements

[Link to Product](#)

Illustration

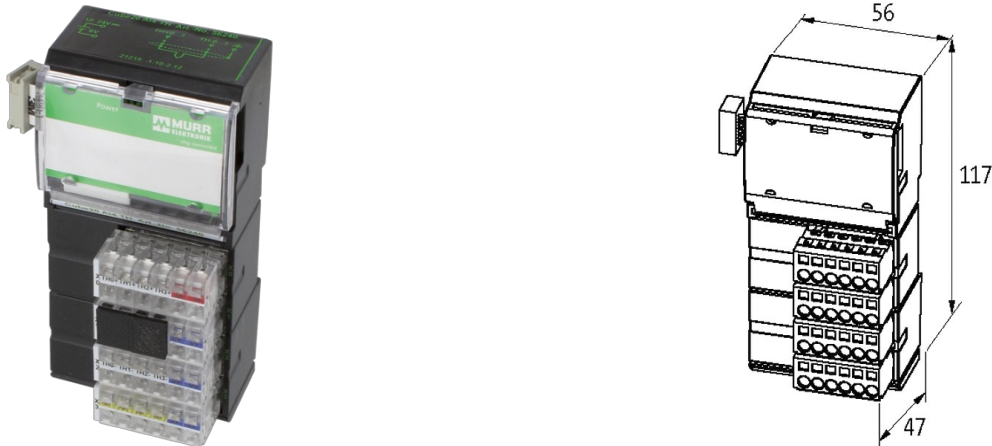

Product may differ from Image



General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -20...+85 °C)
Protection	IP20
Dimensions H×W×D	117×56×47 mm

Input

Connection	2-wire input; TH+x, TH-x
Accuracy	max. ±2%, cold junction compensation
Conversion time (analog)	max. 300 ms (per channel)
Resolution (analog)	15 Bit + sign
Type	K, N, E, J, R

Internal communication

Current consumption	max. 25 mA from system, max. 45 mA externally (UI)
Module supply	via system connection

Connections

Fieldbus	Ribbon cable connection
Sensor-system/actuator supply	4× spring clamp plug-in terminals, max. 2.5 mm ² (max. 12 A)
I/O ports	12× spring clamp plug-in terminals, max. 2.5 mm ²

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module and channel

Monitoring - under voltage	yes
Monitoring - no voltage	no
Wire break upper/lower limit overload	per channel via LED and BUS
Short-circuit and overload	yes

Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879049177
eClass	27242601
Packaging unit	1.000