

## M12 MALE ON REAR OF MSUD VALVE PLUG FORM BI 11MM

Form BI (11 mm) – M12, connector at the rear

24 V AC/DC  $\pm 25\%$

LED


3-pole

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)


#### Illustration

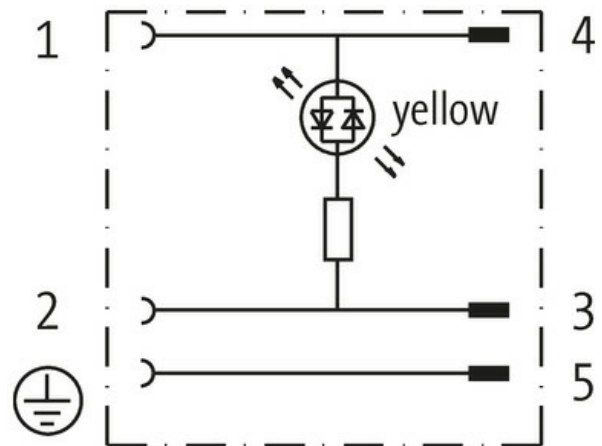

Female

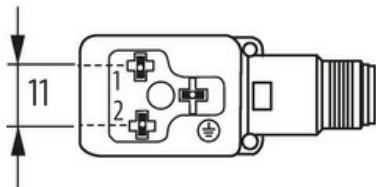

Male

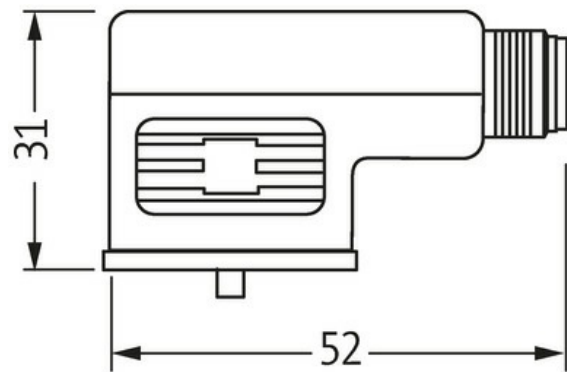

Depth: 22 mm

Product may differ from Image



#### Form

Form 42061

#### Technical Data

Operating voltage	24 V AC/DC $\pm 25\%$
Operating current per contact	max. 4 A
Locking of ports	M3/M12 $\times$ 1 mm (recommended torque 0.4/0.6 Nm)

Protection	IP67 inserted and tightened (EN 60529)
Configuration	2 contacts + PE

**General data**

Temperature range	-25...+85 °C
-------------------	--------------

**Commercial data**

country of origin	CZ
customs tariff number	85366990
EAN	4048879143271
eClass	27143423
Packaging unit	1.000