


## CUBE20S CANOPEN BUS NODE

Bus nodes  
CANopen

### [Link to Product](#)

#### Illustration

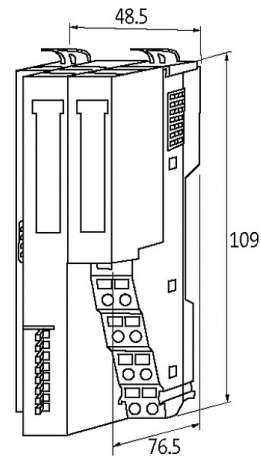

Product may differ from Image



#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+70 °C)
Protection	IP20
Connection	Spring clamp plug-in terminals: max. 1.5 mm <sup>2</sup> (max. 10 A)
Dimensions H×W×D	109×48.5×76.5 mm

#### Module supply

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 95 mA

#### Output

Output voltage (I/Os /Backplane)	24 V DC/5 V DC
Output current (I/Os /Backplane)	10 A/3 A

#### Cube system

Module capacity	max. 64
I/O capacity	max. 128 Byte (Input), max. 128 Byte (Output)

#### Connections

Fieldbus	CAN 1 Mbit/s; SUB-D9
Sensor-system/actuator supply	4× spring clamp plug-in terminals, max. 1.5 mm <sup>2</sup> (max. 10 A)
Internal system connection	4× spring clamp plug-in terminals, max. 1.5 mm <sup>2</sup> (max. 10 A)

#### CANopen

Addressing	DIP switch
------------	------------

#### Diagnostic

Communication status	via LED
----------------------	---------

Diagnostic via LED	per module and channel
--------------------	------------------------

---

Diagnostic via BUS	per module
--------------------	------------

---

Actuator warning	no
------------------	----

---

Monitoring - under voltage	no
----------------------------	----

---

Monitoring - no voltage	yes
-------------------------	-----

---

Short-circuit and overload	yes
----------------------------	-----

**Commercial data**

---

country of origin	TH
-------------------	----

---

customs tariff number	85389099
-----------------------	----------

---

EAN	4048879422383
-----	---------------

---

eClass	27242608
--------	----------

---

Packaging unit	1.000
----------------	-------