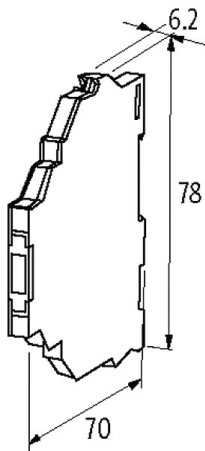
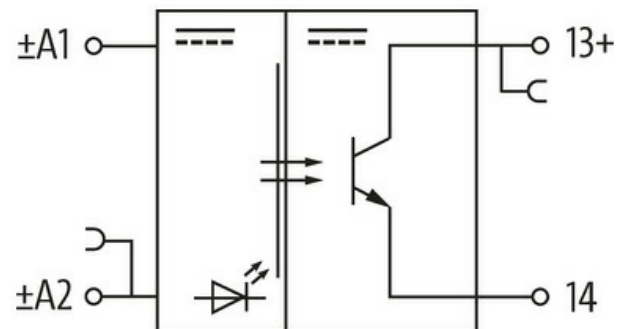


**MIRO TR 24VDC 24VDC 10A FK OPTO-COUPLER MODULE**

IN: 53 VDC - OUT: 48 VDC / 10 A

Transistor 10 A  
24 V DC  
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

**Output**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 25 $\mu$ A
Switching time ON/OFF	2/5 ms (10 A load)
Saturation voltage (across output)	max. 0.12 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1/0.1 Hz (resist./ind.)
Switching current per output	1 mA...10 A

**Input**

Control current	10 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879021746
eClass	27371601
Packaging unit	1.000