


Modlink MSDD-set: Frame 4000-68223-000000,
insert 4000-68000-3250000 + 4000-68000-1210000

[Link to Product](#)

Illustration

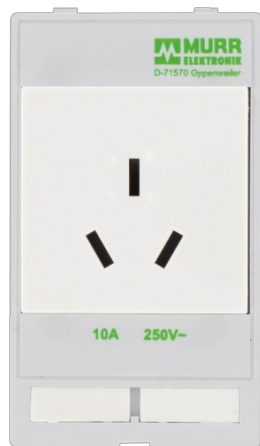

Product may differ from Image

Frame	
suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Frame: zinc die-casting, with surface finishing, Lid: plastic, PC transparent
RJ45	
Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)
China (CCC)	
Operating current	10 A
Connection	Screw terminals: max. 2× 4 mm ² (single/stranded wire)
Operating voltage	250 V AC
No. of poles	2 + PE
Commercial data	
country of origin	DE
customs tariff number	85366990
EAN	4048879330770
eClass	27189217
Packaging unit	1.000