

MVP12, 4XM12, MOSA, PLUGGABLE CABLE

10.0m PUR-JB 8x0,34+5x0,75



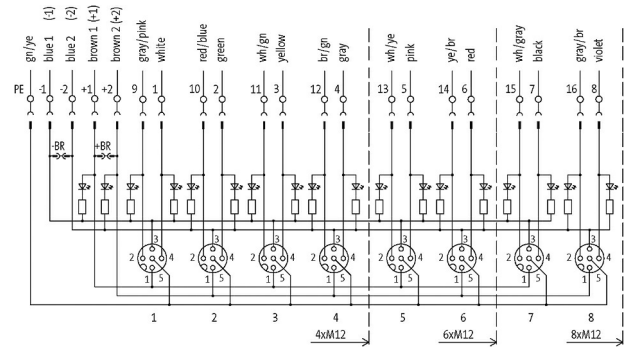
4-way, 5-pole, MOSA

PUR/PVC (UL/CSA)

10.0 m

potentially separated

with LED for digital PNP-signals 24 V DC

[Link to Product](#)**Illustration**

for 2 signals per port

Product may differ from Image

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Cap nut
Connection cross section	0.25...0.5 mm ²
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

General data

Temperature range	-20...+80 °C
Dimensions H×W×D	43×50.2×122 mm

Cables

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

No./diameter of wires	8× 0.34 + 5× 0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	9.2 mm ±5%
Cable number	374
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1/S2)	

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879057622
eClass	27279219
Packaging unit	1.000