

M8 MALE 0° SHIELDED WIREABLE SCREW TERM.3-pol. 0,14...0.5mm²

Male straight

M8, 3-pole

shielded




Screw terminals

Connection cross section: 0.14...0.5 mm²

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

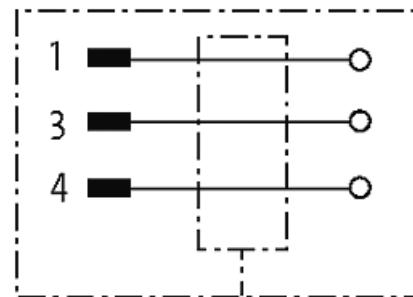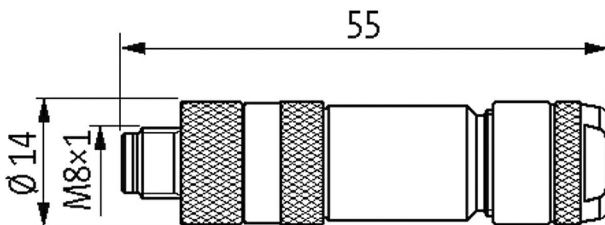

Product may differ from Image

Form

Form 08641

Technical Data

Operating voltage	max. 60 V
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	III
Connection cross section	0.14...0.5 mm ²
Sealing range (cable Ø)	4...5.5 mm
Protection	IP67 inserted and tightened (EN 60529)
Over voltage category	III

General data

Pollution Degree	3
Temperature range	-40...+85 °C
Material (contact)	Brass, gold plated

Dimensions H×W×D 55×14×14 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879224499
eClass	27279221
Packaging unit	1