
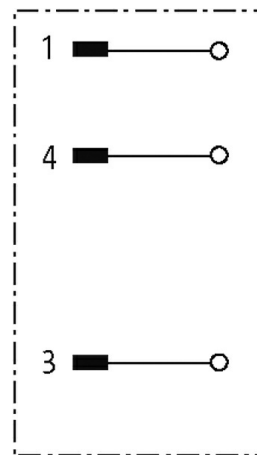
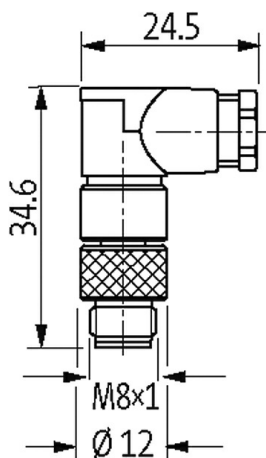


**M8 MALE 90° FIELD-WIREABLE (SOLDER PINS)**3-pol. 0.25mm<sup>2</sup>

Male 90°  
M8, 3-pole  
with solder pins  
Connection cross section: max. 0.25 mm<sup>2</sup>

[Link to Product](#)**Illustration**

Male



Product may differ from Image

**Form**

Form 08441

**Technical Data**

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.25 mm <sup>2</sup>
Sealing range (cable Ø)	3.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)

**General data**

Temperature range	-25...+85 °C
Dimensions H×W×D	34.6×18.5×12 mm

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879224642
eClass	27279221
Packaging unit	1