

h-coupler M12 Power male S-cod. / 2x female S-cod.

4-pol.

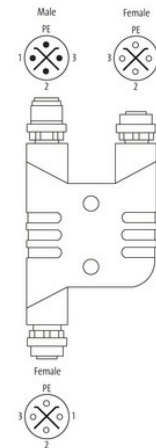
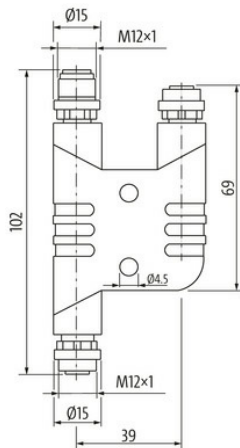
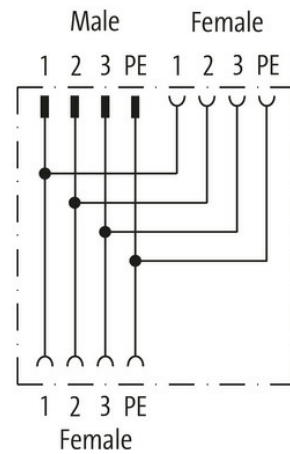
Power

h coupler M12 male S-coded/ 2x M12 female S-coded

4-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 630 V AC; max. 600 V AC (UL)
Operating current per contact	12 A
No. of poles	4-pole
Coding	S-coded
LED display	no

Protection IP65, IP67, IP68

General data

Standards IEC 61076-2-111 (M12)

Material (contact) Brass, gold plated

Pollution Degree 2

Temperature range -30...+90 °C

Material (contact carrier) PA

Commercial data

country of origin DE

customs tariff number 85366990

EAN 4048879840101

eClass 27279220

Packaging unit 1.000