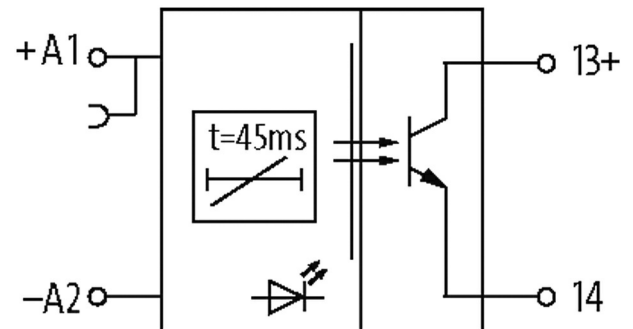
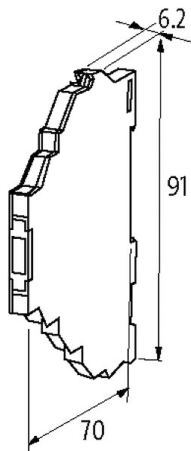


MIRO 6.2 TIMER

Impulsverlängerung 24 VDC / 25 mA / 45 ms

Transistor output
 Impulse expansion: 40...45 ms
 Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	no galvanic separation
Dimensions HxWxD	91x6.2x70 mm

Output

Min. load current	0.1 mA
Switching voltage	2...30 V DC
Switching frequency	max. 20 Hz
Switching current per output	max. 25 mA

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85364110
EAN	4048879411608
eClass	27210990
Packaging unit	1.000