

## T-coupler M12 female / M12 male/female 230V C-cod

T-coupler

Male straight – females straight

M12 – M12, 3-pole




Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

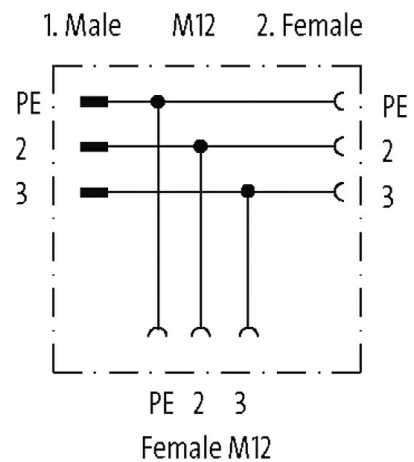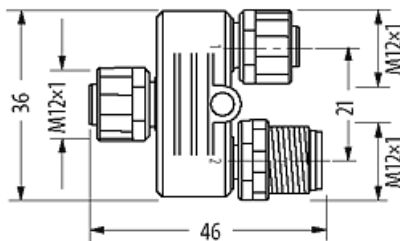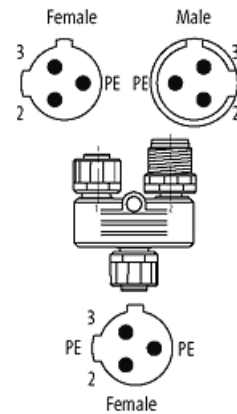

Product may differ from Image



#### Form

Form 52101

#### Technical Data

Operating voltage	max. 230 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Plastic

Rated surge voltage 2.5 kV

**General data**

Temperature range -25...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879489256
eClass	27279218
Packaging unit	1