

EXACT12, 8XM12, 5-POLE, BASIC HOUSING

Without homerun-cable

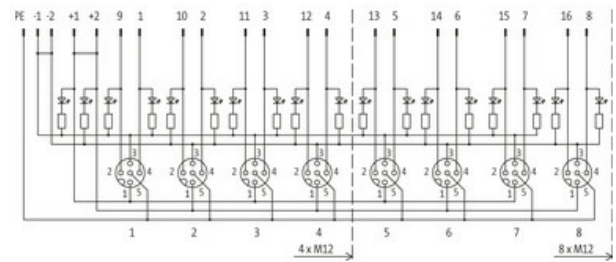
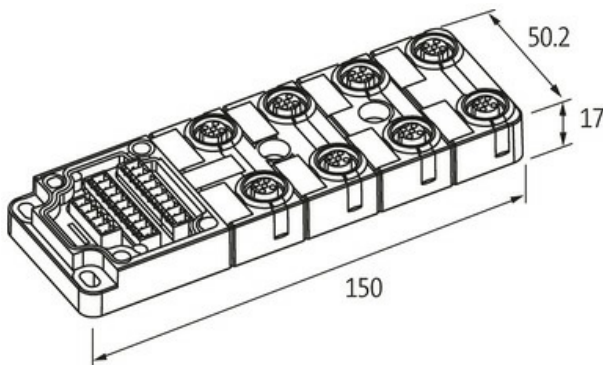
8-way, 5-pole

Form PNP

Screw plug-in terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

M12-Females 5-pole


5 (PE) 4 (N/O)(S1)
3 (-) 1 (+)

9 11 13 16 14 12 10

2 (N/C) (S2)

-1 +1 1 3 PE 4 2 +2 2

5 7 15 8 6



for 2 signals per port

Product may differ from Image

**Technical Data**

Operating voltage 24 V DC

Operating current per contact max. 4 A

Protection IP65/IP67

Housing Plastic, flame retardant

Total current max. 8 A

General data

Temperature range -20...+70 °C

Contact Layout

PIN 1 (+)

PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879054065
eClass	27143423
Packaging unit	1.000