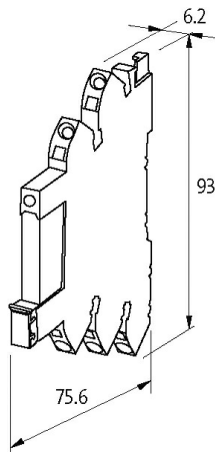
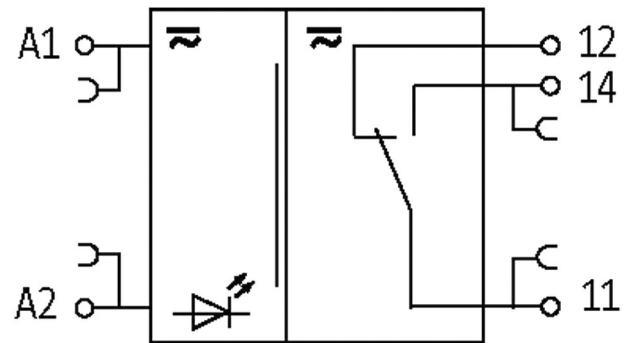


MIRO 6.2 PLUGGABLE COMPL.MODULE OUTPUT RELAY

IN: 12 VAC/DC - OUT: 250 VAC/30VDC / 6 A

1 NO/NC contact
6 A
12 V AC/DC
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

| | |
|------------------------|--|
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -25...+60 °C |
| Test isolation voltage | 250 V |
| Mech./ elect. life | 10 000 000 switching cycles (NO) 30 000; (NC) 10 000, load dependent |
| Protection | IP20 |
| Dimensions H×W×D | 93×6.2×75.6 mm |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| Output | |
|--------------------------------------|---|
| Min. load current | 100 mA |
| Contact material | Ag Sn O2 |
| Energize/release/contact bounce time | 8/4/- ms |
| Switching voltage | max. 250 V AC/30 V DC |
| Switching frequency | max. 10 Hz |
| Power rating (voltage dependent) | max. 1500 VA/180 W |
| Switching current per output | max. 6 A |
| Input | |
| Connection voltage - current | 9.8...14 V AC/DC - approx. 14.2 mA |
| LED display | LED (green) |
| Utilization category | |
| AC-15 | 3 A (24/110 V AC); 1.5 A (230 V AC) |
| AC-12 | 6 A (24/110/230 V AC) |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |
| Commercial data | |
| country of origin | CN |
| customs tariff number | 85364900 |
| EAN | 4048879021340 |
| eClass | 27371601 |
| Packaging unit | 1.000 |