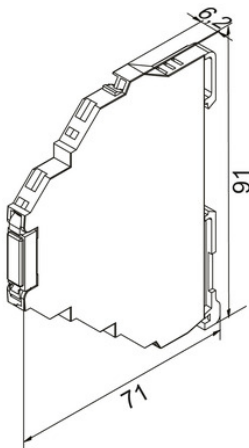
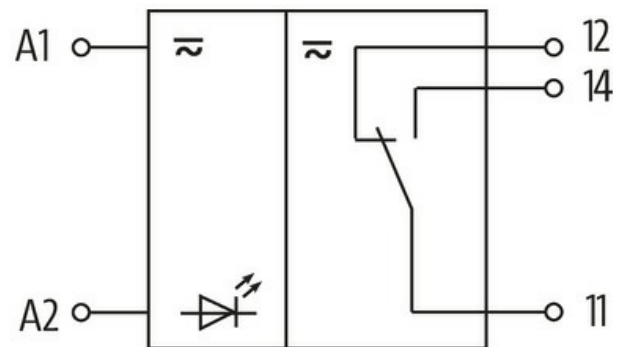


MIRO 6.2 115V-1U OUTPUT RELAY WITH LEAKAGE**CURRENT SUPPRESSION**

1 NO/NC contact
6 A
115 V AC/DC
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+60 °C
Protection	IP20
Connection	Spring clamp terminal
Dimensions H×W×D	91×6.2×71 mm

Output	
Min. load current	100 mA
Contact material	Ag Sn O ₂
Switching voltage	max. 250 V AC/DC
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching current per output	max. 6 A
Input	
LED display	LED (green)
Utilization category	
AC-15	3 A (24/110/230 V AC)
AC-12	6 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
Commercial data	
country of origin	CZ
customs tariff number	85364900
EAN	4048879879781
eClass	27371601
Packaging unit	1.000