

**xtremeDB passive module XDB-2-CAN**

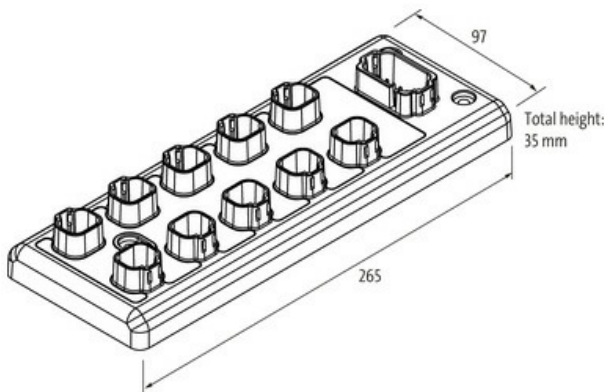
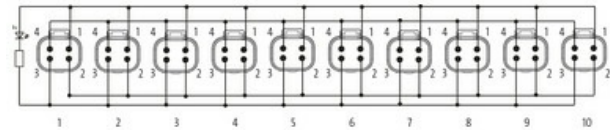
10x DT4P - Pins connected 1:1

10-way, 4-pole, 4 signals 1:1


Plug connection DT-4P

IP69K (when using MDC xtreme connection cables)

Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)**Illustration**

Female  
male contacts



Product may differ from Image

**Technical Data**

Operating voltage	8...32 V DC
Operating current per contact	max. 13 A
Housing	PA
Total current	max. 13 A

**General data**

Temperature range	-40...+80 °C
-------------------	--------------

**Commercial data**

country of origin	US
customs tariff number	85369010
EAN	89336773314
Packaging unit	1.000