

MIUW ANALOG COUPLER COMPONENT

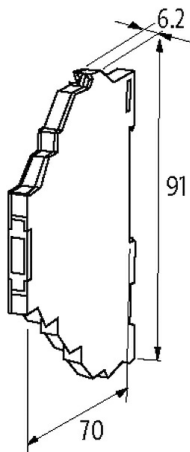
IN: 0..20 mA - OUT: 0..10 V

INPUT: 0...20 mA

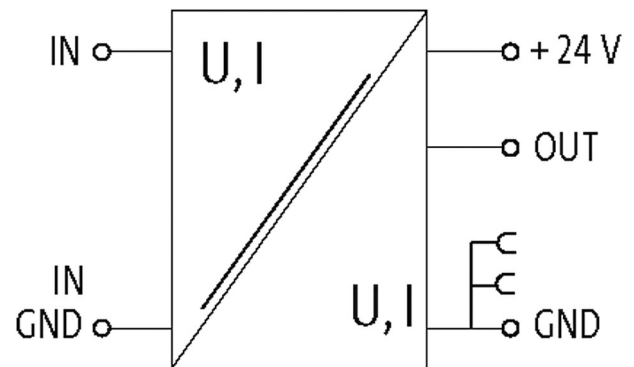
OUTPUT: 0...10 V DC, 20 mA

Spring clamp terminals

Input and output galvanically separated

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC $\pm 20\%$, smoothed
Operating current	50...70 mA
Frequency	max. 500 Hz

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C (storage temperature -40...+80 °C)
Test isolation voltage	1.5 kV
Dimensions H×W×D	91×6.2×70 mm

Voltage output signals

Load	max. 25 mA
------	------------

Current outputs

Load	max. 500 Ω
------	-------------------

Commercial data

country of origin	CZ
customs tariff number	85437090
EAN	4048879022484
eClass	27210990
Packaging unit	1.000