

**M12 male 90° D-cod. with cable shielded**

PVC 1x4xAWG22 shielded gn UL/CSA+drag ch. 7.5m

Ethernet CAT5  
Male 90°  
M12, 4-pole  
D-coded  
shielded



Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)



Illustration

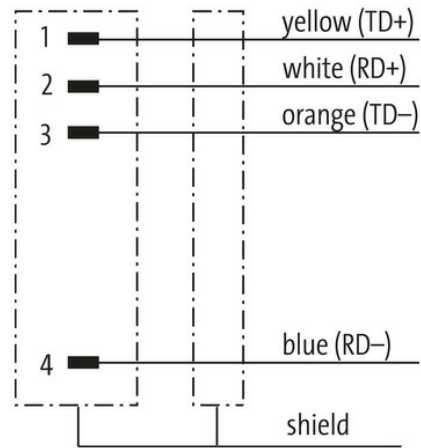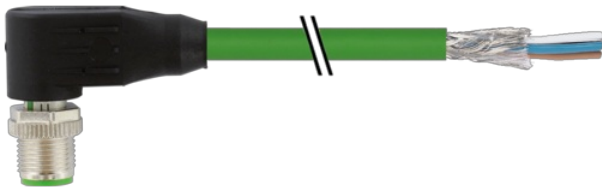

Male



Product may differ from Image



\* only for products with UL/CSA approved cable

| Form                                      |  |
|---|--|
| Form                                      | 14561  |
| Technical Data                            |  |
| Operating voltage                         | max. 60 V DC   |
| Operating voltage (only UL listed)        | max. 30 V DC   |
| Rated surge voltage                       | 1.5 kV   |
| Operating current per contact             | max. 4 A   |
| Transfer parameters                       | CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)                                       |
| Transfer rate                             | up to 100 Mbit/s full duplex   |
| Material group                            | IEC 60664-1, category I  |
| Coding                                    | D-coded  |
| Locking of ports                          | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing                       |
| Compression gland                         | M12 (SW13)   |
| Protection                                | IP65, IP66K, IP67 inserted and tightened (EN 60529)                                    |
| Material                                  | PUR  |
| Locking material                          | Zinc die casting, matte nickel plated  |
| suitable for corrugated tube (internal Ø) | without  |
| General data                              |  |
| Standards                                 | DIN EN 61076-2-101 (M12)   |
| Pollution Degree                          | 3  |
| Stripping length (jacket)                 | 20 mm  |
| Temperature range                         | -25...+85 °C, depending on cable quality   |
| Cables                                    |  |
| Cable identification                      | 800  |
| Approval (cable)                          | UL (AWM-Style 2571/10578), CSA; CE conform; Profinet Guideline                         |
| Cable weight [g/m]                        | 73,7 g   |
| Material (wire)                           | Cu wire, bare  |
| Resistor (core)                           | max. 55 Ω/km (20 °C)   |
| Construction (core)                       | 7× 0.254 mm  |
| Diameter (core)                           | 1× 4× AWG22/7  |
| AWG                                       | similar to AWG 22  |
| Material (wire isolation)                 | PE   |
| Shore hardness (wire isolation)           | 55 ±5 D  |
| Wire-Ø incl. isolation                    | 1.52 mm ±5%  |
| Color/numbering of wires                  | wh, ye, bl, or   |
| Shield                                    | yes  |
| optical shield cover                      | min. 85%   |
| Material (jacket)                         | PVC  |
| Shore hardness (jacket)                   | 85 ±5 A  |
| Outer-Ø (jacket)                          | 6.5 mm ±5%   |
| Color (jacket)                            | green  |
| chemical resistance                       | Oil resistance IEC 60811-2-1, ASTM Öle 1, ICEA S-82-552 Std.                           |
| thermal resistance                        | flammwidrig nach UL 1581 Section 1060 (FT1), Section 1061 (cable flame), IEC 60332-1-2 |
| Nominal voltage                           | 300 V AC   |
| Test voltage                              | 2000 V AC (test duration 1 min)  |
| Temperature range (fixed)                 | -30...+80 °C   |
| Temperature range (mobile)                | -10...+70 °C   |
| Bend radius (fixed)                       | 5× outer Ø   |
| Bend radius (moving)                      | 15× outer Ø  |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

|                                 |                     |
|---------------------------------|---------------------|
| No. of bending cycles (C-track) | max. 2 Mio. (25 °C) |
|---------------------------------|---------------------|

|                        |              |
|------------------------|--------------|
| Travel speed (C-track) | max. 3.3 m/s |
|------------------------|--------------|

|                        |            |
|------------------------|------------|
| Acceleration (C-track) | max. 2 m/s |
|------------------------|------------|

**Commercial data**

|                   |    |
|-------------------|----|
| country of origin | DE |
|-------------------|----|

|                       |          |
|-----------------------|----------|
| customs tariff number | 85444290 |
|-----------------------|----------|

|     |               |
|-----|---------------|
| EAN | 4048879623933 |
|-----|---------------|

|        |          |
|--------|----------|
| eClass | 27061801 |
|--------|----------|

|                |       |
|----------------|-------|
| Packaging unit | 1.000 |
|----------------|-------|