

T COUPLER M12 LITE MALE / M12 LITE FEMALE 0°

T-coupler

Male straight – females straight

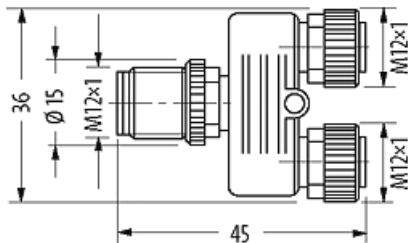
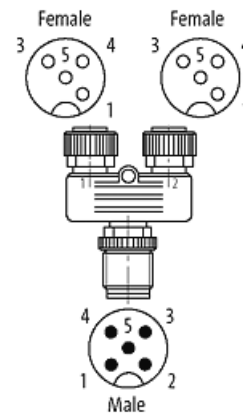
M12 – M12, 5-pole

Distribution function (NO)

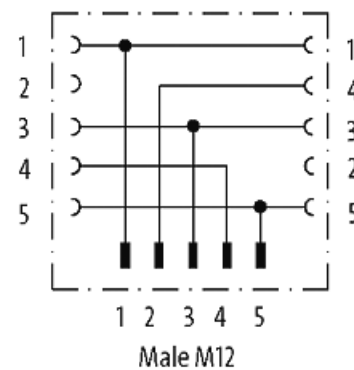
7005 - plastic hexagonal screw (M12 Lite)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

1. Female M12 2. Female



Product may differ from Image

**Form**

Form 41121

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Black plastic

Rated surge voltage 1.5 kV

General data

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879109468
eClass	27279218
Packaging unit	1