

Valve plug MJC 0° with cable LED+VDR

RADOX EM 104 2x0.75 bk 20m




Female straight
12...24 V AC/DC
LED and VDR
with cable sleeves

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.

[Link to Product](#)

Illustration

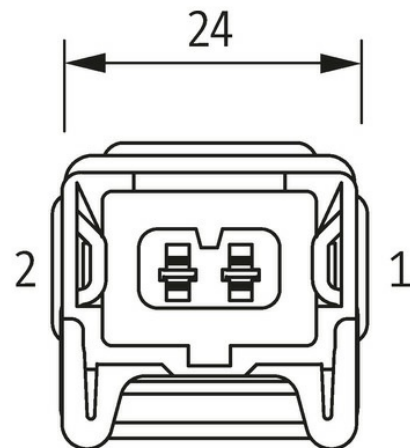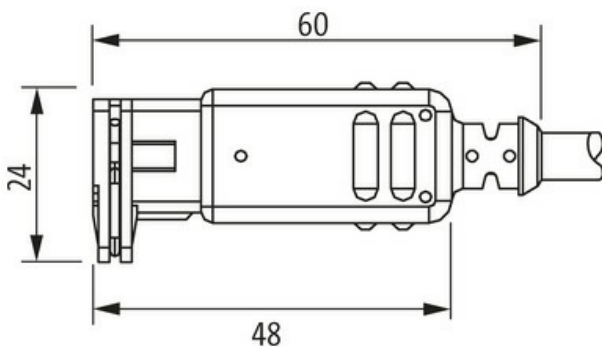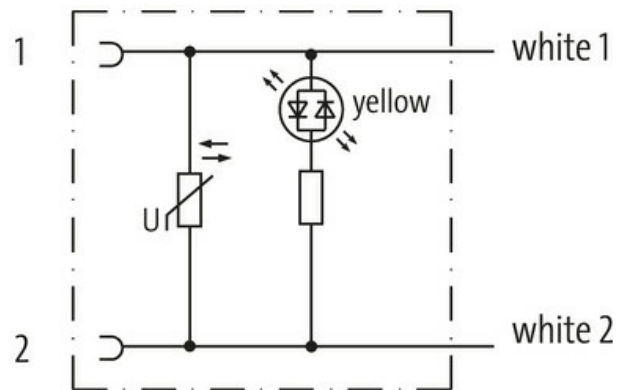

Product may differ from Image

Form

Form 70061

Technical Data

Operating voltage	12...24 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A
LED display	yellow
suitable for corrugated tube (internal Ø)	10 mm
Housing	Black plastic, flame retardant

Additional suppressor VDR

General data

Pollution Degree 3
Stripping length (jacket) 50 mm

Cables

Cable identification R21
Approval (cable) DIN EN 45545-2, CE conform
Cable weight [g/m] 48,4 g
Material (wire) Cu wire, tin plated
Resistor (core) max. 26 Ω /km (20 °C)
Single wire \varnothing (core) 0.23 mm
Construction (core) 19x 0.23 mm
Diameter (core) 2x 0.75 mm²
AWG similar to AWG 18
Material (wire isolation) Radox EI 303
Wire- \varnothing incl. isolation 1.62 mm \pm 5%
Color/numbering of wires wh (bk num)
Stranding combination 2 wires twisted
Shield no
Material (jacket) Radox EM 104
Outer- \varnothing (jacket) 4.75 mm \pm 5%
Color (jacket) black
Jacket Color black
Nominal voltage 600/1000 V AC
Test voltage 3500 V AC
Current load capacity according to DIN VDE 0298-4
Temperature range (fixed) -50...+120 °C
Temperature range (mobile) -25...+90 °C
Bend radius (fixed) 3x outer- \varnothing
Bend radius (moving) 4x outer- \varnothing

Commercial data

country of origin DE
customs tariff number 85444290
EAN 4048879703970
eClass 27279218
Packaging unit 1.000