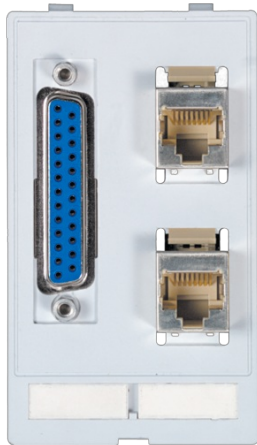


MODLINK MSDD DATA INSERT

1×SUB-D25 female/male + 2×RJ45

RJ45; RJ45; SUB-D25
 2× RJ45, 8-pole metal, CAT5e (female/female)
 1× SUB-D25 (female/male)

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Dimensions H×W×D	88×51×21 mm
------------------	-------------

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

Shielding plate

Tightening torque	0.9 Nm ±0.1
Connection	Threaded hole M4

SUB-D25

Locking of ports	UNC 4...40 bolt
Operating current	3 A
Connection rear side	SUB-D (male)
Connection front side	SUB-D (female)
Operating voltage	48 V AC/DC
Operating current (UL Rating)	max. 175 mA
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
No. of poles	25-pole

Commercial data

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

country of origin	DE
customs tariff number	85366990
EAN	4048879037433
eClass	27189217
Packaging unit	1.000