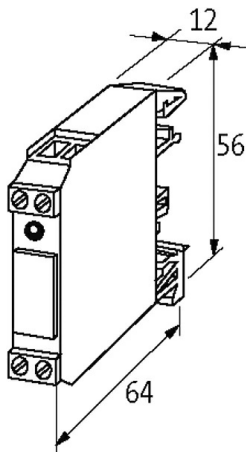
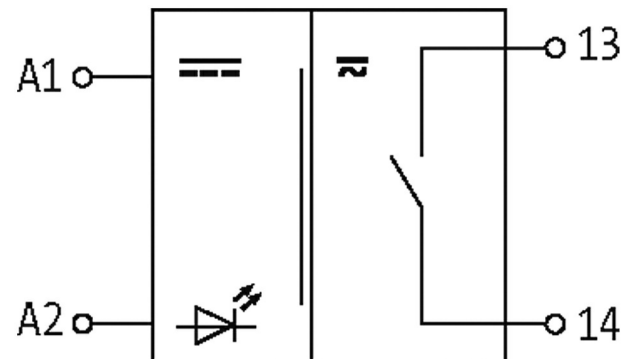


RMM 24VDC OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 6 A

1 relay; 1 NO contact
6 A
24 V DC
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-40...+60 °C
Test isolation voltage	4.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent

Output

Min. load current	100 mA
Contact material	Ag Ni
Switching voltage	max. 250 V AC/DC
Switching frequency	50...60 Hz
Power rating (voltage dependent)	max. 1250 VA/240 W

Switching current per output max. 6 A

Input

Connection voltage - current 24 V AC/DC (19.2...30 V AC/DC) - 15 mA

LED display LED (red)

Utilization category

AC-15 4 A (24/110/230 V AC)

AC-1 6 A (24/110/230 V AC)

DC-13 2 A (24 V DC); 0.25 A (110 V DC); 0.1 A (230 V DC)

Commercial data

country of origin CZ

customs tariff number 85364900

EAN 4048879027571

eClass 27371001

Packaging unit 1.000